


POLARRACK XG : 78.00 x 24.00 x 42.00
PART NO: TBD


MOUNTING RAILS: RMU

SQUARE HOLE RAIL, 42U
 (2) PAIR, 19" EIA-310-D COMPLIANT
 RMU MARKS BOTTOM TO TOP
 30 PC M6 HARDWARE INCLD.
 ADJUSTABLE FRONT-BACK
 MAX. EQ DEPTH: 38.00"




TOP VIEW

CLEAR, 6mm TWINWALL PANEL
 WITH CABLE KNOCK-OUTS ON
 EACH SIDE
 REMOVABLE, FLUSH MOUNT

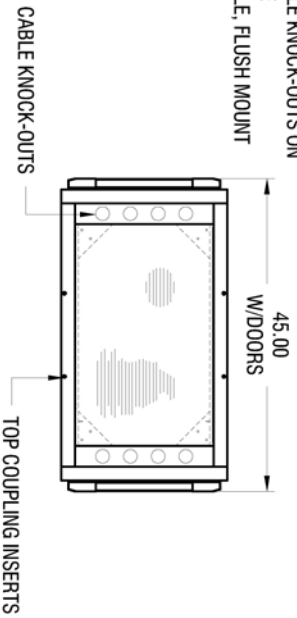


BOTTOM VIEW

FLOOR MOUNT DIMS: 15.25 x 33.25
 (4) FLOOR LEVELERS INCLUDED

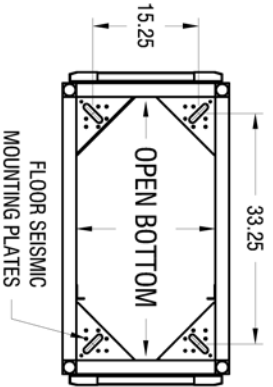

REVISIONS		
REV	ECD	DATE

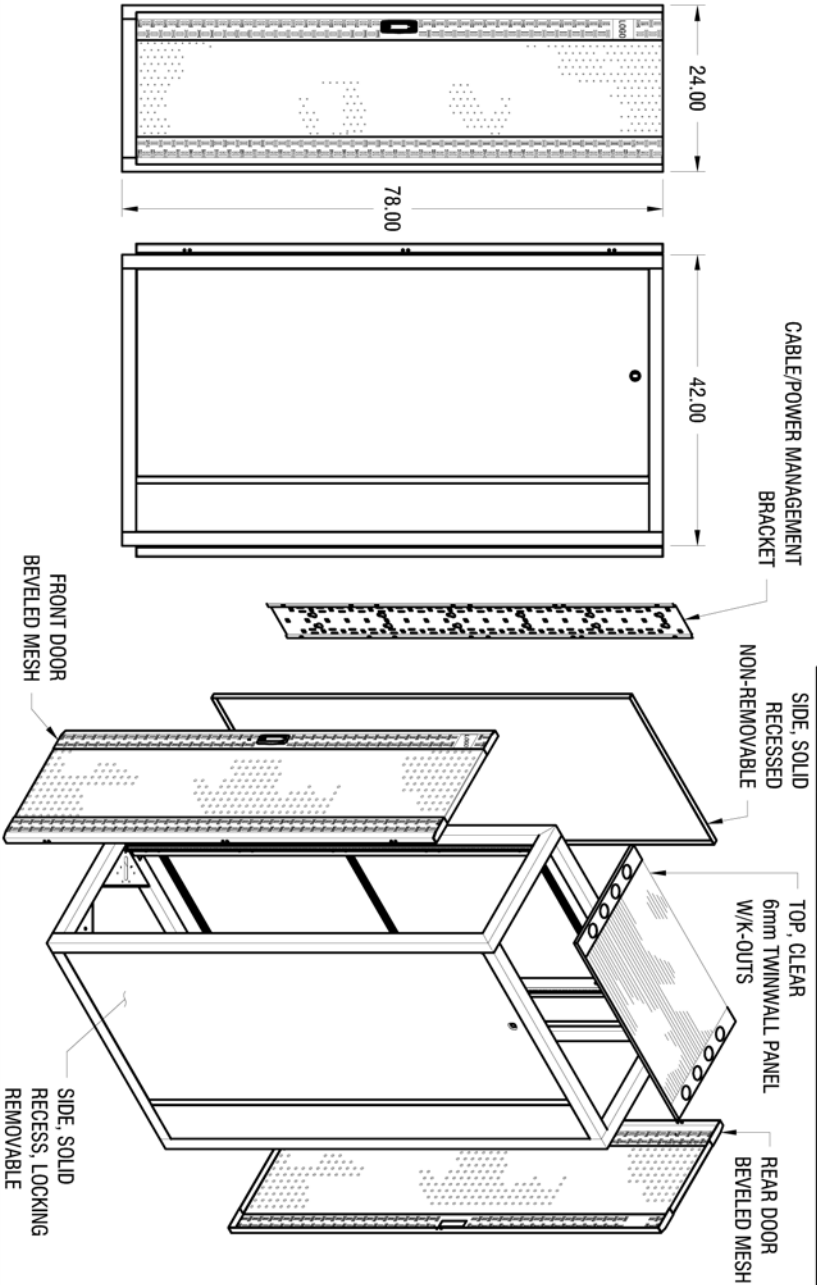

DIMENSIONS

POLARRACK XG
 2 x 2 TUBULAR STEEL
 HEIGHT: 78.00
 WIDTH: 24.00
 DEPTH: 42.00

MOUNTING RAIL

42RMU, L-TYPE ANGLES
 SQUARE HOLE RAIL
 EIA SPACING, 5/8 x 5/8 x 1/2
 19.00" RACKABLE
 ADJUSTABLE, MAX. 29.00 DEPTH

DOORS/F/B

HI FLO MESH, 77% AIR-FLOW
 REINFORCED BEVELED DESIGN
 W/CUSTOM PATTERN
 PREMIUM LOCK, KEYED ALIKE
 DIMS: 76.00H x 22.00W x 0.50D

ACCESSORIES

CABLE/POWER MANAGEMENT
 BRACKET AND OTHER
 ACCESSORIES SOLD SEPARATE

WT CAPACITY
 3000 LBS. STATIC CAP.



ALL INFORMATION ARE PROPRIETARY DATA OF POLARRACK, INC.
 PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM
 WITHOUT WRITTEN PERMISSION FROM POLARRACK, INC.
 TOLERANCE XXX ± .010 XX ± .030 X ± .060 (TOFG) ± .5
 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

POLARRACK XG CABINET
 78.00 x 24.00 x 42.00
 W/SQUARE HOLE RAILS

PART NO.	

MATERIAL: N/A
 FINISH: EPDM-POWDER-COAT
 MAX BEND R=1.000 RELIEF=.080 A/R
 UNLESS OTHERWISE SPECIFIED