

## **GENERAL INFORMATION**


STANDARD SIZES: 4' AISLE (24"x52"), 6' AISLE (24"x76") CUSTOM SIZES: WIDTH (FROM 8" TO 24"), LENGTH (FROM 12" TO 96") WEIGHT: 4' AISLE = 6.8lbs, 6' AISLE = 9.9lbs, CUSTOM = VARIES

FRAME: CLEAR ANODIZED ALUMINUM (BLACK POWDER COAT OPTION) CORNER: MOLDED NYLON (BLACK)

PANEL: POLYVINYL CHLORIDE PLASTIC (CLEAR & FROSTED OPTIONS)

## **DIRECT MOUNTING NOTES**

- 1. PANEL RESTS ON TOP OF RACK ENCLOSURES TO FORM THE "ROOF" OF THE CONTAINMENT AISLE.
- 2. PANEL IS MOUNTED TO ENCLOSURES WITH 1"x1" 3M DUAL LOCK, ALL 4 CORNERS (TYP.). 1"x1" FLAT SURFACE (MIN.) ON ENCLOSURE REQUIRED TO ADHERE FASTENER.

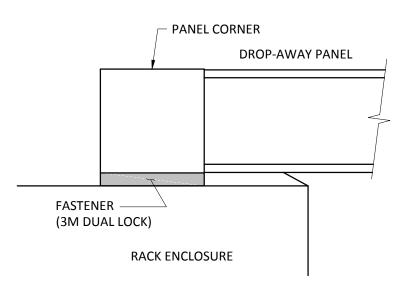


**DETAIL "A"**SCALE: NTS

POLARGY, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USE IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE O SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM POLARGY INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

ALT. UNITS:

POLARGY - POLARPLEX DROP-AWAY PANEL OVERVIEW & DIRECT MOUNTING

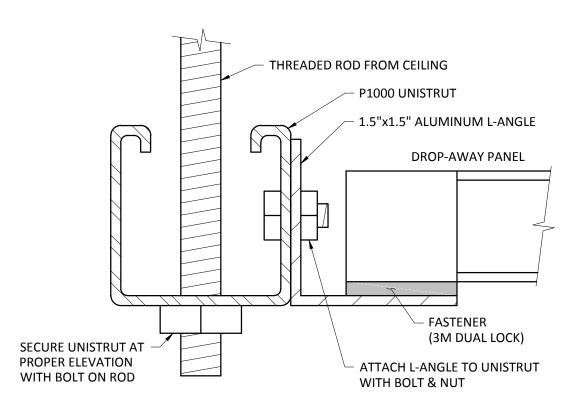

**DETAIL "A"**SCALE: NTS

## NOTES

- 1. PANEL RESTS ON TOP OF 1.5"x1.5" ALUMINUM L-ANGLE TO FORM THE "ROOF" OF THE CONTAINMENT AISLE.
- 2. PANEL IS MOUNTED TO L-ANGLE WITH 1"x1" 3M DUAL LOCK, ALL 4 CORNERS (TYP.).
- 3. THREADED ROD SIZE AND SPACING PER PROJECT REQUIREMENTS.
- 4. L-ANGLE ATTACHMENT BOLT SPACING PER PROJECT REQUIREMENTS.

ı	-
-	-
-	-
-	-
DATE	REVISION

ALT. UNITS:

POLARGY - POLARPLEX DROP-AWAY PANEL FLOATING CEILING MOUNTING



AND SPECIFICATIONS HEREIN ARE THE PROPERTY AND SHALL NOT BE COPIED, REPRODUCED OR USI N PART, AS THE BASIS FOR THE MANUFACTURE O WITHOUT WRITTEN PERMISSION FROM POLARGI DRAWING IS BASED UPON LATEST AVAILABLE

